

EXTRA HEAVY CHROMIUM BRASS FIXTURES

- #172 Trip Lever Drain Overflow and Release \$75
3 Ft. or 3 ½ Ft. Trip Lever Unit. Can be installed at any location. Simply operate lever at overflow to open and close drain valve. "O" Rings on valve prevent leakage.
- #2 Wall Spout 1/2 inch \$33
- #700 Single Fill Faucet ½" S.P.S \$43

SAVE 10 %

6KW heater, pump, installation kit, Trip drain, Overflow, Release, Spout, Faucet, And Remote Auto Fill 3000 Accessories

SPECIAL PRICE: \$728.00


No. 3000 Remote Operated Electric Fill Valve

with #2 Fill Port and Automatic Water Level Control and Automatic Heating and Low Water Cut Off Protection for Heater and Pump. Operation: When power is turned on, baptistry will automatically fill and turn off at proper level. Heater (and pump) automatically turn on and heat baptismal water to adjustable thermostat temperature. Heater and pump turn off. Proper water level is automatically maintained. Heater and pump are protected against abnormal low water condition.

Price \$189.00

#230 Electrical Interrupter is designed to turn off all power to the Baptistry Heating Electrical System if there is a short of only 5 to 6 milliamps. Protecting people from electrical shock. The National Electrical Codes in many states, counties and cities are requiring that a ground fault interrupter must be installed in electrical systems where it is possible for people to be subjected to a short-to-ground condition. The #230, rated at 30A., will handle the 6KW, or 11.5KW Circulation Heaters. Wiring diagrams are supplied with the Ground Fault Interrupter. Always install GFI as close to the heater as possible. Nipple the GFI to the contactor box or heater cover box.

GFCI Price \$89.00

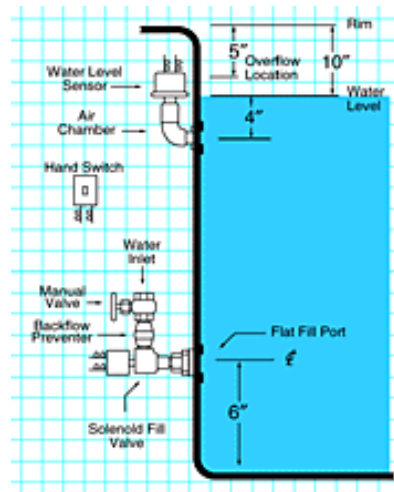

No. 5000 Automatic Filling, Heating, Draining System "Baptistry Automatic Water System"

Deluxe, completely automatic remote control system provides effortless, accurate control of all fill, heat and drain functions from an attractive remote control console panel. Included in the Automatic 5000 are:

Automatic Filling, Water Level, Thermostatic Control Low Water Cut-off Protection for Heater & Pump Overflow & Drain Release Unit, Water Circulating Pump Remote Control Panel.

All functions are operated by one 3-way "on," "off," "drain" switch. Two 24-volt circuits are all that is required from switch to baptistry heater contactor and drain. Complete installation and wiring instructions.

PRICE: \$490.00

6 KW or 11.5 KW Circulation Heater

Incoloy Steel Heating Elements / Adjustable Thermostat Well Insulated with Fiberglass / 240v single phase power Can be used with 208v, but heating is reduced 25% Can be used with 120v, but heating is reduced 75% pump is 1/40 H.P. - 120v - circulated 600 GPH at 1' head Hi-limit switch is set at 118°F (± 4°)

11.5 kw kit includes 24v transformer and 48 amp resistive rating contactor (required to operate)

Kits include heater, pump, installation kit, and DELIVERY

6kw \$468.00

11.5KW \$695.00

Model	"A"	"B"	"C"	Inlet or Outlet	Amps Drawn
6 KW 6000w	27"	21 3/8"	5 1/2"	1" F.S.P.S.	25 amp
11.5 KW 11,500w	29 1/2"	24 3/4"	4 3/4"	1" M.S.P.S.	47.9 amp

UL Listed #E22869

