


PRODUCT FEATURES

1. **GROUND FAULT CIRCUIT INTERRUPTER** – This device is required for portable tubs as specified in the national electrical code article 680. The GFCI is designed to protect against potential electrical shock hazard should a ground fault occur.
2. **THERMOSTAT** - The thermostat regulates the water temperature of your tub.
3. **PUMP RECEPTACLE** – Connect pump here.
4. **OPTIONS (AFC) RECEPTACLE** – Provides Auto-Fill and Auto-Drain function. Auto-Fill Control (PT# 48-0037) or Bypass Plug must be installed.
5. **HIGH LIMIT** - A safety switch that will shut the heater off if the temperature within the heater reaches a non-adjustable limit. Push to reset.
6. **HEATER ASSEMBLY** - Thermostatically controlled and equipped with a high-limit safety shut off.
7. **PUMP ASSEMBLY** – Pumps water to and from the baptistry
8. **PLUMBING HEADER ASSEMBLY** – Connects the pump to the heater
9. **BASE** – ABS base for mounting equipment

Figure 1.0

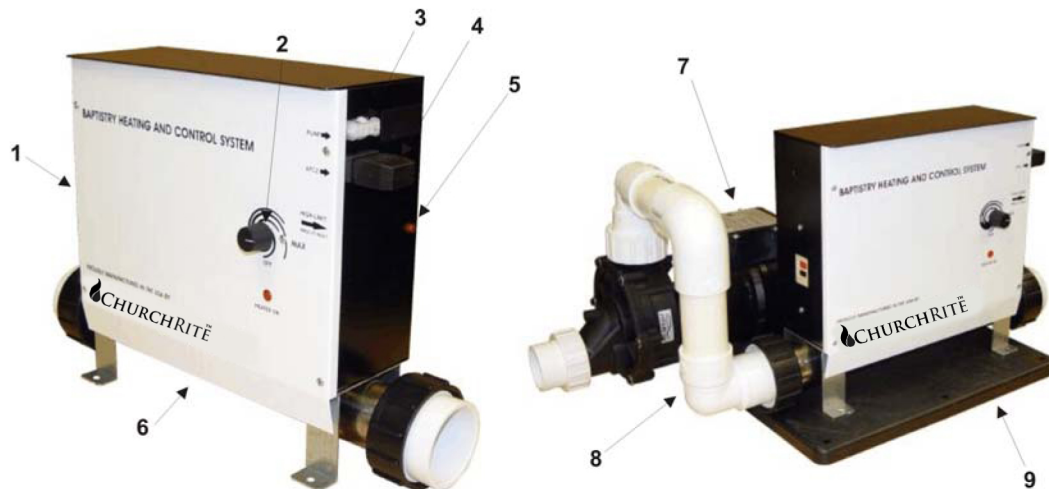

7/09