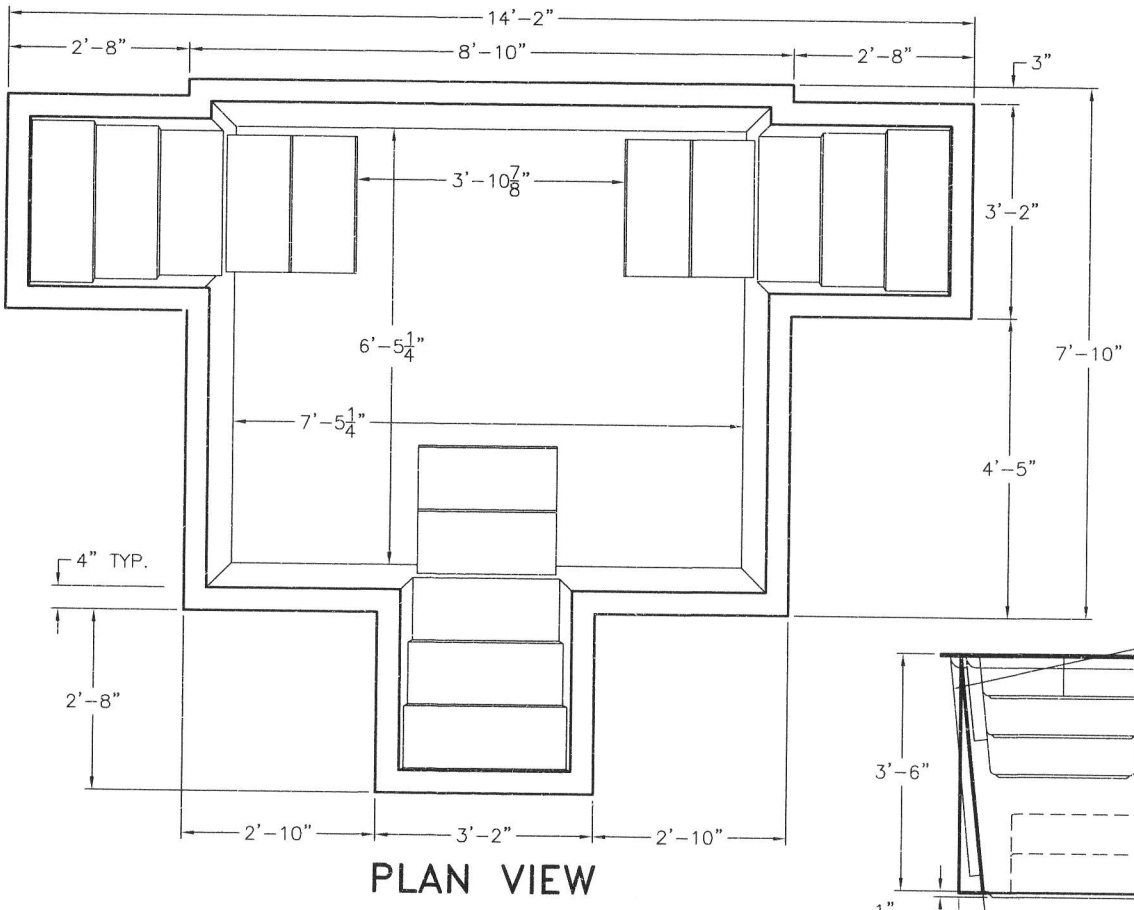

PLAN VIEW

INSTALLATION NOTES:
Plumbing holes (drain, heater, etc.) to be located and cut in field by contractor or plumber.

Drain should be located in any of the four corners of the tank floor.

NOTE:
Steps shall conform to nationally accepted model building code requirements with regard to riser height and tread width. Step tread surfaces shall have a raised disk slip-resistant surface. All corners shall be gently rounded for safety.

Capacity: 940 gal.

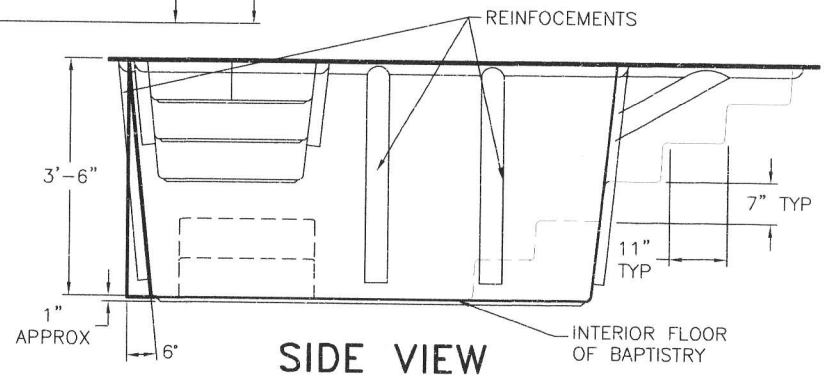

SIDE VIEW

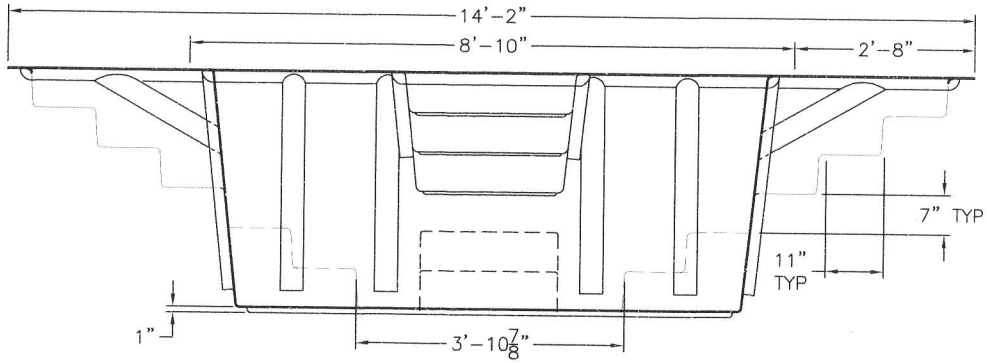

END VIEW